

The Joule Box has been designed to measure volts and amperes for monitoring procedure variables and calculating heat input



### Features

\*\*\*\*\*

- Measures 0-100 VDC & 0-500 Amps
- Certified Analog meters.
- Light weight.
- Durable splash tight case.
- Self contained, Self powered
- 10ft electrode and ground leads
- Special connectors and polarity switching are available.



Marketed by

**EUROWELD**

Mooresville, NC USA - 704 662 3993 - [www.euroweld.com](http://www.euroweld.com)

# JOULE BOX 2



**JOULE BOX 2** is a Self Contained  
Fully digital, raw data, fast sampling device  
Samples and analyzes over 10,000 events per second

The 4 line back lit LCD display indicates:

- ✓ Instantaneous Voltage, 0 to 100
- ✓ Instantaneous Amperage, Amperage Probe Ranges  
300A, 400A, 500A, 600A, 800A, 1000A, or 1200A
- ✓ Joules/Second
- ✓ Battery Percentage




- ✓ Operator Controlled sampling
- ✓ 20 ft Electrode Voltage cable
- ✓ 20 ft Ground cable
- ✓ 20 ft Amperage Probe cable
- ✓ Voltage Polarity switch
- ✓ Power ON switch
- ✓ Manual Sample / Reset switch
- ✓ Onboard Battery and charging

Marketed by

**EUROWELD**

Mooresville, NC USA

[www.euroweld.com](http://www.euroweld.com) - 704 662 3993

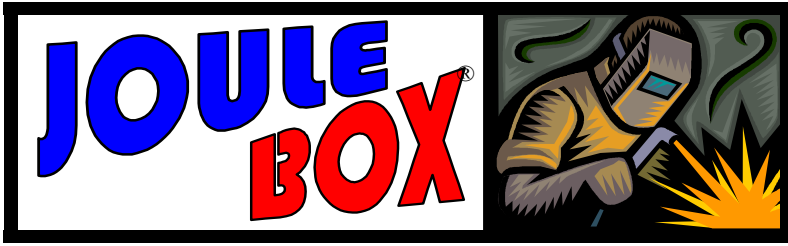

The Joule Box has been designed to measure volts and amperes for monitoring procedure variables and calculating heat input



**Features**  
\*\*\*\*\*

- Measures 0-100 VDC & 0-500 Amps
- Certified Analog meters.
- Light weight.
- Durable splash tight case.
- Self contained, Self powered
- 10ft electrode and ground leads
- Special connectors and polarity switching are available.



Marketed by

**EUROWELD**

Mooresville, NC USA - 704 662 3993 - [www.euroweld.com](http://www.euroweld.com)



**JOULE BOX 2** is a Self Contained Fully digital, raw data, fast sampling device  
Samples and analyzes over 10,000 events per second

The 4 line back lit LCD display indicates:

- ✓ Instantaneous Voltage, 0 to 100
- ✓ Instantaneous Amperage, Amperage Probe Ranges 300A, 400A, 500A, 600A, 800A, 1000A, or 1200A
- ✓ Joules/Second
- ✓ Battery Percentage



- ✓ Operator Controlled sampling
- ✓ 20 ft Electrode Voltage cable
- ✓ 20 ft Ground cable
- ✓ 20 ft Amperage Probe cable
- ✓ Voltage Polarity switch
- ✓ Power ON switch
- ✓ Manual Sample / Reset switch
- ✓ Onboard Battery and charging

Marketed by

**EUROWELD**

Mooresville, NC USA  
[www.euroweld.com](http://www.euroweld.com) - 704 662 3993